

BRCS150N10SDPQ

Rev.A Jun.-2022

描述 / Descriptions

TO-252 塑封封装 N 沟道场效应管。

N-CHANNEL MOSFET in a TO-252 Plastic Package.

特征 / Features

$R_{DS(on)}$ 小, 门电荷低, C_{rss} 小, 开关速度快, 符合 AEC-Q101 标准高可靠性要求, 无卤产品。


Low $R_{DS(on)}$, low gate charge, low C_{rss} , fast switching, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

用途 / Applications


用于低压电路如: 汽车电路、DC/DC 转换、便携式产品的电源高效转换, 满足汽车应用的严格要求。

Suited for low voltage applications such as automotive, DC/DC Converters, and high efficiency switching for power management in portable and battery operated products, Meet the stringent requirements of automotive applications.

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning



PIN1 : G

PIN 2 : D

PIN 3 : S

PIN 4 : D

印章代码 / Marking

见印章说明。

See Marking Instructions.

极限参数 / Absolute Maximum Ratings(Ta=25°C)

| 参数 Parameter | 符号 Symbol | 数值 Rating | 单位 Unit |
|---|----------------------|-----------------|--------------|
| Drain-Source Voltage | V_{DSS} | 100 | V |
| Drain Current | $I_D(Tc=25^\circ C)$ | 55 | A |
| Drain Current - Pulsed | I_{DM} | 138 | A |
| Gate-Source Voltage | V_{GS} | ± 20 | V |
| Avalanche Current | I_{AS} | 7.0 | A |
| Single Pulsed Avalanche Energy(L=0.5mH) | E_{AS} | 24.5 | mJ |
| Power Dissipation | $P_D(Tc=25^\circ C)$ | 73 | W |
| Storage Temperature Range | T_{stg} | -55 to 150 | $^\circ C$ |
| Thermal Resistance-Junction to Ambient | $t \leq 10s$ | $R_{\theta JA}$ | $^\circ C/W$ |
| | Steady-State | | |
| Thermal Resistance-Junction to Case | Steady-State | $R_{\theta JC}$ | 1.7 |

电性能参数 / Electrical Characteristics(Ta=25°C)

| 参数 Parameter | 符号 Symbol | 测试条件 Test Conditions | 最小值 Min | 典型值 Typ | 最大值 Max | 单位 Unit |
|------------------------------------|---------------|--|------------|------------|------------|------------|
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{GS}=0V$ $I_D=250\mu A$ | 100 | 108 | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS}=100V$ $V_{GS}=0V$ | | | 1.0 | μA |
| Gate-Body Leakage Current Forward | I_{GSS} | $V_{GS}=\pm 20V$ $V_{DS}=0V$ | | | ± 100 | nA |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS}=V_{GS}$ $I_D=250\mu A$ | 1.5 | 1.8 | 2.5 | V |
| Static Drain-Source On-Resistance | $R_{DS(on)}$ | $V_{GS}=10V$ $I_D=20A$ | | 13 | 15 | m Ω |
| | | $V_{GS}=4.5V$ $I_D=10A$ | | 18 | 25 | |
| Drain-Source Diode Forward Voltage | V_{SD} | $V_{GS}=0V$ $I_S=1A$ | | | 1.2 | V |
| Gate resistance | R_g | $V_{GS}=0V$ $V_{DS}=0V,$ $f=1MHz$ | | 1.5 | | Ω |
| Input Capacitance | C_{iss} | $V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$ | | 1140 | | pF |
| Output Capacitance | C_{oss} | | | 600 | | |
| Reverse Transfer Capacitance | C_{rss} | | | 60 | | |
| Total Gate Charge | $Q_{g(10V)}$ | $V_{GS}=10V,$ $V_{DS}=50V,$ $I_D=20A$ | | 32.5 | | nC |
| Total Gate Charge | $Q_{g(4.5V)}$ | | | 15.5 | | |
| Gate Source Charge | Q_{gs} | | | 6.5 | | |
| Gate Drain Charge | Q_{gd} | | | 5 | | |

BRCS150N10SDPQ

Rev.A Jun.-2022

电性能参数 / Electrical Characteristics(Ta=25°C)

| 参数 Parameter | 符号 Symbol | 测试条件 Test Conditions | 最小值 Min | 典型值 Typ | 最大值 Max | 单位 Unit |
|---------------------|--------------|--|------------|------------|------------|------------|
| Turn-On Delay Time | $t_{d(on)}$ | $V_{GS}=10V$ $V_{DS}=50V$ $R_L=2.5\ \Omega$ $R_{GEN}=3\ \Omega$ | | 7 | | ns |
| Turn-On Rise Time | t_r | | | 3 | | |
| Turn-Off Delay Time | $t_{d(off)}$ | | | 27 | | |
| Turn-Off Fall Time | t_f | | | 4 | | |

电参数曲线图 / Electrical Characteristic Curve

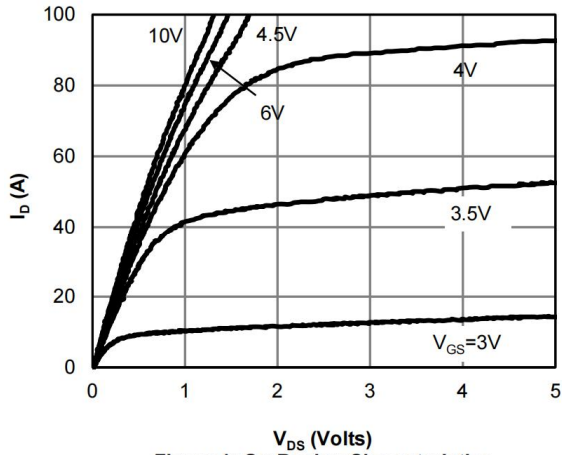


Figure 1: On-Region Characteristics

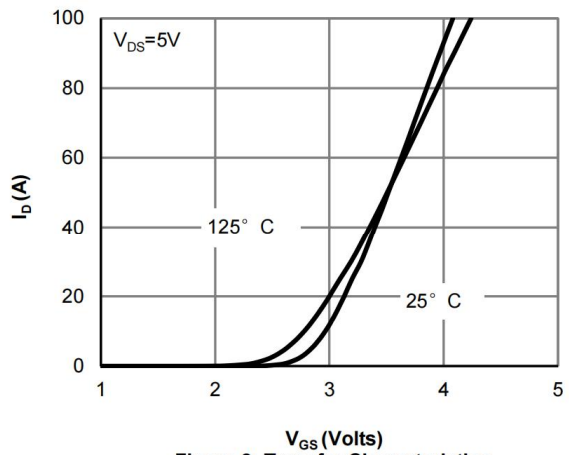


Figure 2: Transfer Characteristics

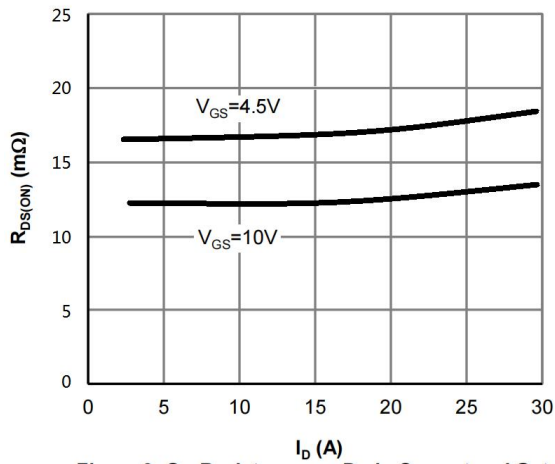


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

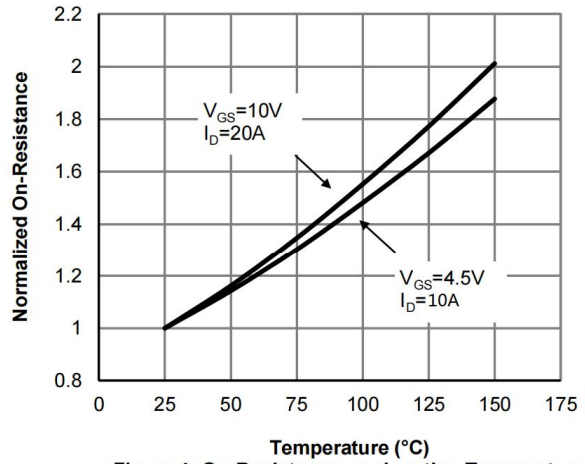


Figure 4: On-Resistance vs. Junction Temperature

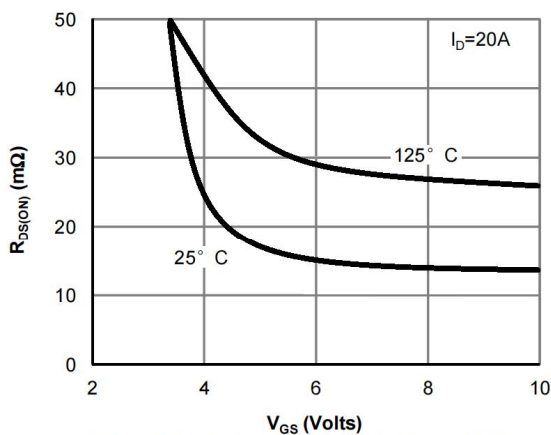


Figure 5: On-Resistance vs. Gate-Source Voltage

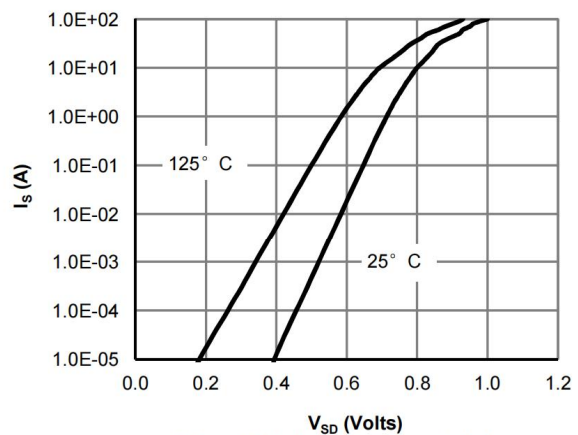


Figure 6: Body-Diode Characteristics

电参数曲线图 / Electrical Characteristic Curve

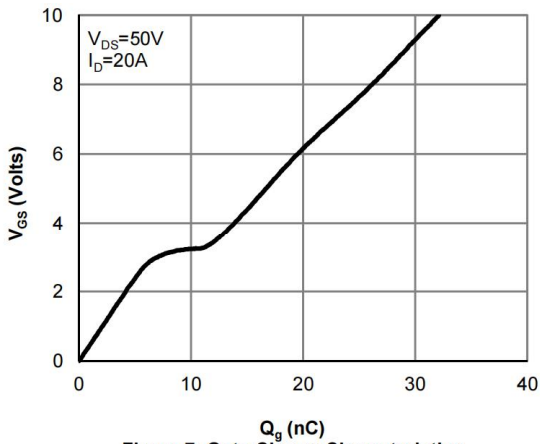


Figure 7: Gate-Charge Characteristics

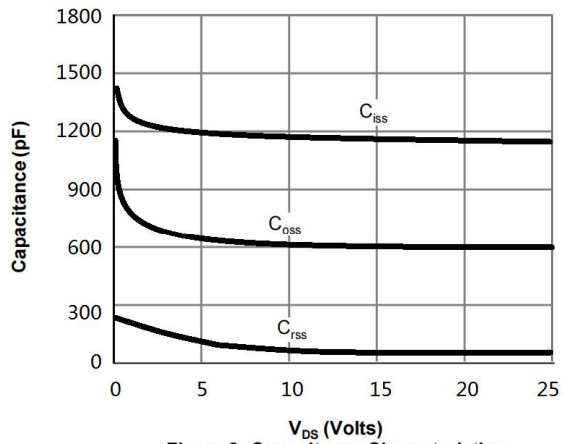


Figure 8: Capacitance Characteristics

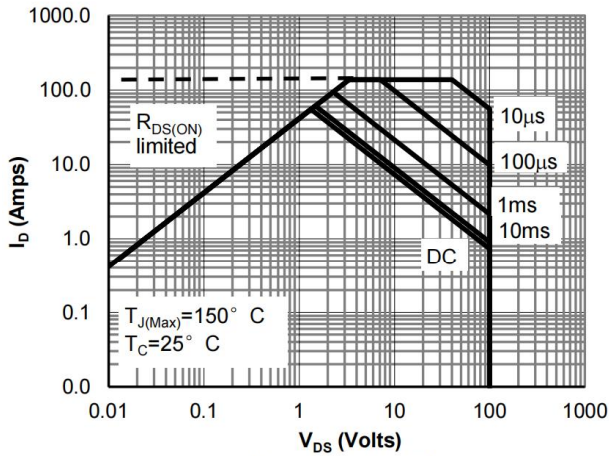


Figure 9: Maximum Forward Biased Safe Operating Area

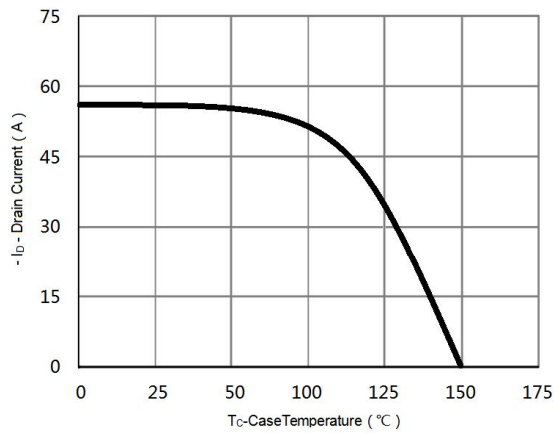


Figure 10: Maximum Continuous Drain Current Vs Case Temperature


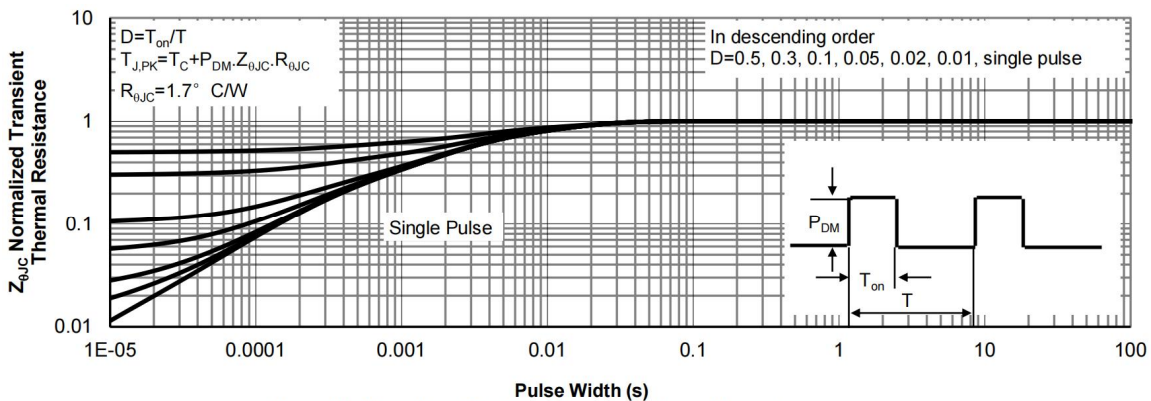


Figure 11: Normalized Maximum Transient Thermal Impedance

外形尺寸图 / Package Dimensions

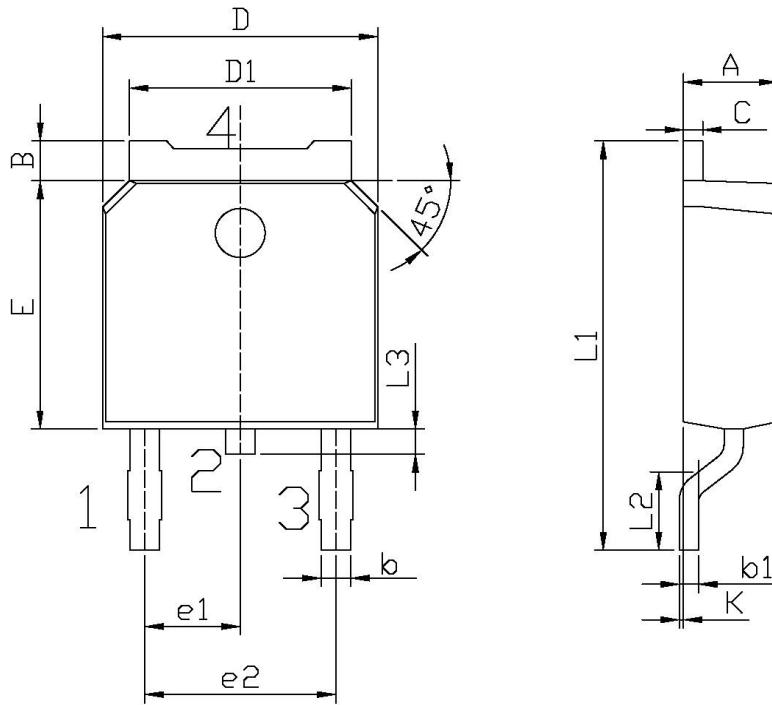


单位: mm

| Symbol | Dimensions In Millimeters | | Symbol | Dimensions In Millimeters | |
|--------|---------------------------|------|--------|---------------------------|-------|
| | Min | Max | | Min | Max |
| A | 2.20 | 2.40 | E | 5.95 | 6.25 |
| B | 0.95 | 1.25 | e1 | 2.24 | 2.34 |
| b | 0.70 | 0.90 | e2 | 4.43 | 4.73 |
| b1 | 0.45 | 0.55 | L1 | 9.85 | 10.35 |
| C | 0.45 | 0.55 | L2 | 1.70 | 2.00 |
| D | 6.45 | 6.75 | L3 | 0.60 | 0.90 |
| D1 | 5.10 | 5.50 | K | 0.00 | 0.10 |

TO-252

印章说明 / Marking Instructions

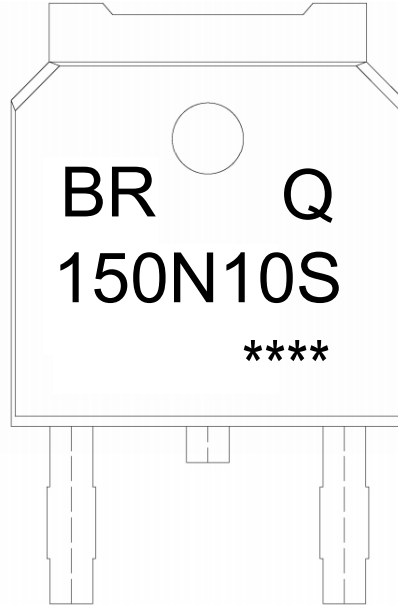

说明：

BR： 为公司代码

Q： 为汽车无卤产品标识

150N10S： 为型号代码

****： 为生产批号代码，随生产批号变化


Note:

BR: Company Code

Q: Automobile halogen-free product Code

150N10S: Product Type Code

****: Lot No. Code, code change with Lot No

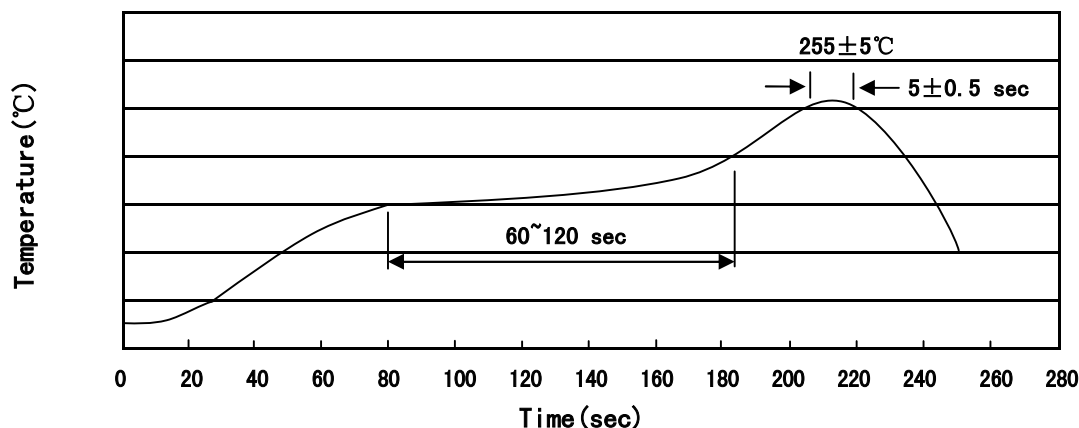回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)


说明：

- 1、预热温度 150~200°C，时间 60~120sec;
- 2、峰值温度 255±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:150~200°C, Time:60~120sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: mm ³) | | |
|----------------------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---|-------------|-------------|
| | Units/Reel 只/卷盘 | Reels/Inner Box 卷盘/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Reel | Inner Box 盒 | Outer Box 箱 |
| TO-252 | 2,500 | 2 | 5,000 | 6 | 30,000 | 13" ×16 | 360×360×50 | 380×335×366 |

套管包装 / TUBE

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: mm ³) | | |
|----------------------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---|-------------|-------------|
| | Units/Tube 只/套管 | Tubes/Inner Box 套管/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Tube 套管 | Inner Box 盒 | Outer Box 箱 |
| TO-251/252 | 75 | 48 | 3,600 | 5 | 18,000 | 526×20.5×5.25 | 555×164×50 | 575×290×180 |

使用说明 / Notices